



G08 ANNA SERIES



Shopping Mall




Exhibition Center



Public Area




Parking Lot



Stadium



Recreational Sports



Toll Station



Building Surroundings



Areas of application

- Recreational sports
- Building Surroundings
- Public area, parking lot
- Shopping mall, exhibition center

Product features

- Wide range of beam angle packages to suit a variety of lighting environments
- Luminaire efficacy up to 150-180lm/W
- IP66 design with 5 years warranty
- Lifetime over 100,000hrs, low maintenance cost


Product benefits

- An energy-saving, direct retrofit solution on the existing light pole
- Integrated surge protection 10KV
- Robust die-casting aluminum housing to survive in outdoor
- Easy installation and maintenance

Specification


Model NO.	VKS-FL0050-G08	VKS-FL0100-G08	VKS-FL0150-G08	VKS-FL0200-G08	VKS-FL0300-G08	VKS-FL0500-G08	VKS-FL0600-G08
Power	30-50W	100W	150W	200W	300W	400-500W	600W
Input Voltage	200-240VAC, 50-60Hz						
LED	Lumileds 2835/5050						
Driver	Inventronics/Sosen/Moso						
CCT	3000K/4000K/5700K						
CRI	>70 (>80,>90 Optional)						
SDCM	<5						
Power Factor	0.95						
Efficacy	150lm-180lm/W						
IP Ratng	IP66						
IK Ratng	IK08						
Control	On-off / 1-10V / DALI						
Surge Protection	10KV						
Beam Angle	15°/25°/60°/90°/120°/A01/A02/T2M/T3M/T4M						
Warranty	5 Years						
Housing Color	Black/Grey						
Material	Aluminum,PC lens, Tempered glass						
Finish	Powder Coating						
Operating Temperature	-30 to +50°C						
Life Span	>100,000Hrs						

Lighting Distribution

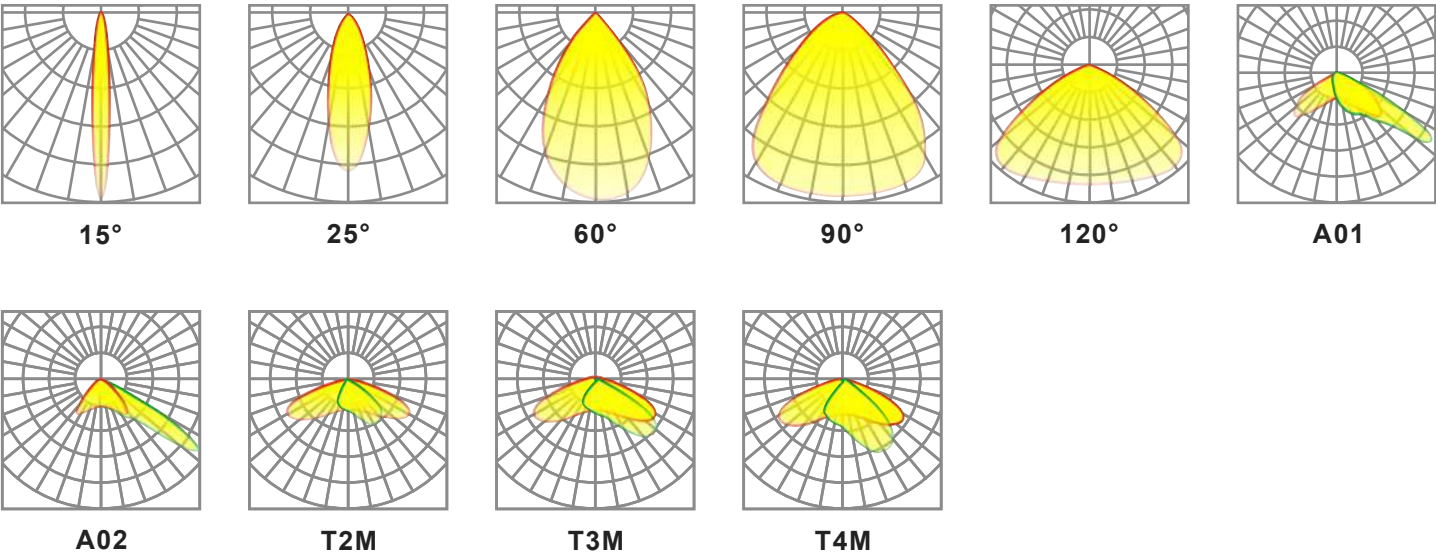

Dimensions (mm)

Unit:mm

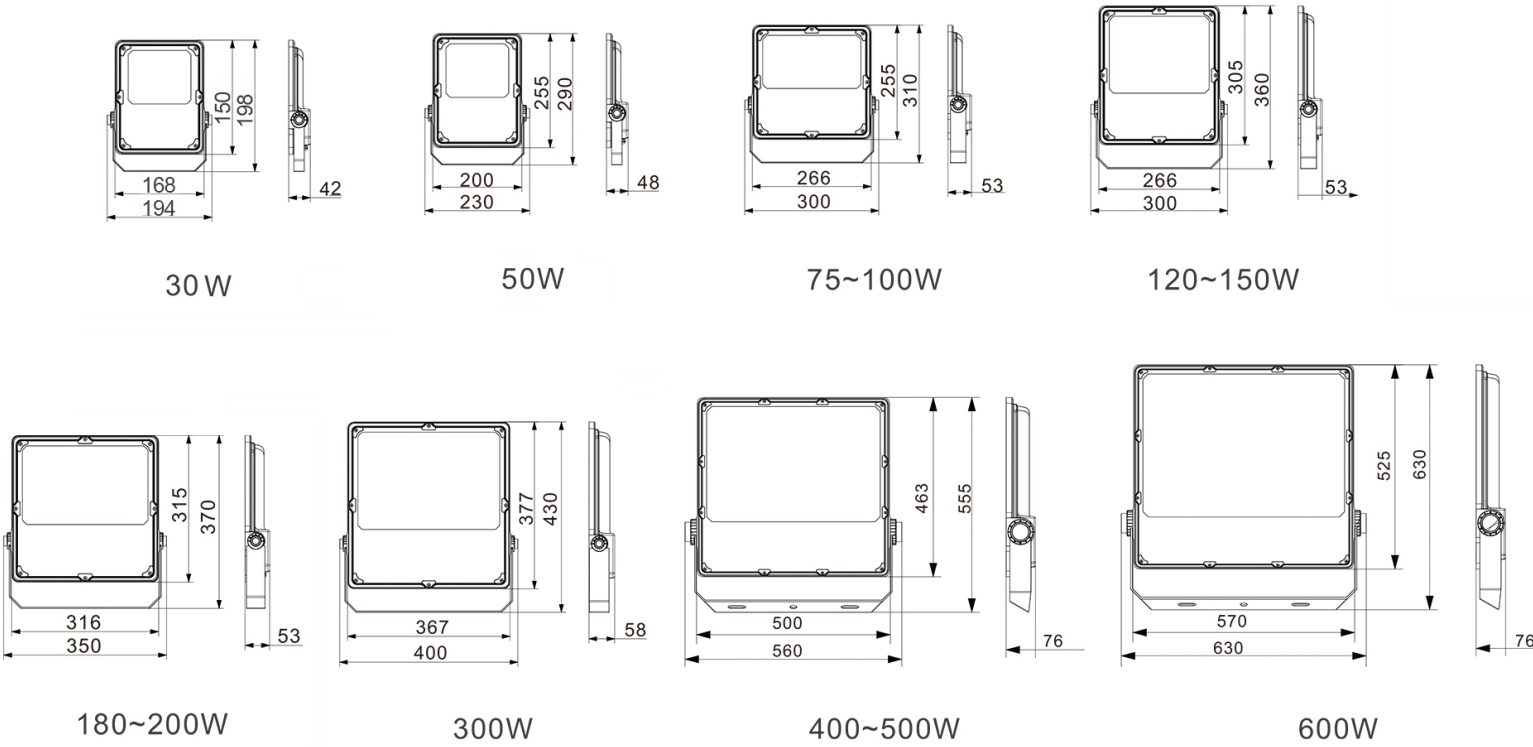

Installation

